

# G1系列 / G1 Series

# G17系列 / G17Series



## 联动防水轻触开关

### Series-Active Seald Tact Switch

#### ■ 特点/Features

- ◆ 防水防尘 (IP67)设计
  - ◆ 长寿命、高可靠性
  - ◆ 0.8\*0.8PCB端子
  - ◆ 双手柄同时操作方可导通之安全操作设计
  - ◆ 可配多种手柄及多种控制方式
  - ◆ 超小型体积, 可适用于狭小空间
- Water and Dust Proof(IP67) Design
  - Long life、High Reliability
  - 0.8\*0.8 PCB terminal
  - Operate the two levers at the same time for safety operation
  - Variety of levers and control methods
  - Mini size,could be used for tight space

#### ■ 应用/Application


- ◆ 汽车/Auto
- ◆ 工业控制/Industry control

#### ■ 特性参数/Parameters:


额定值/Rating		12VDC 20 $\mu$ A ~ 20mA
操作频率 Operating Frequency	电气/Electrical	20次/分钟 cycles/minute
	机械/Mechanical	G1系列Series: 120次/分钟 cycles/minute G17系列Series: 80次/分钟 cycles/minute
初始接触电阻/Contact Resistance(Initiative)		< 200m $\Omega$
绝缘电阻/Insulation Resistance(at500VDC)		> 10M $\Omega$
抗震动/Vibration durability		10~55Hz, 振幅/Amplitude 1.5mm,
耐电压/ Voltage Resistance	端子间/Between Terminals	500VAC(50~60Hz)
	端子与胶壳间/ Between terminals and housing	1500VAC(50~60Hz)
寿命/Service Life	电气/Electrical	100,000次/cycles
	机械/Mechanical	100,000次/cycles
保存温度/Storage Temperature		-40°C ~ +85°C
保存湿度/Storage Humidity		85%RH MAX
单重/Unit weight	G1:0.85g	
	G17:1.1g	

# ZING EAR


## ■ 外形图 /Shape

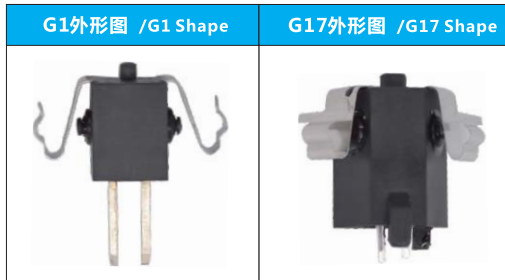

## ■ 接触形式图 /Circuit Configuration

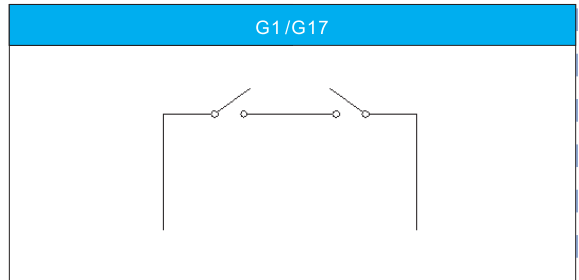

## ■ G1外形尺寸 /G1 Dimension

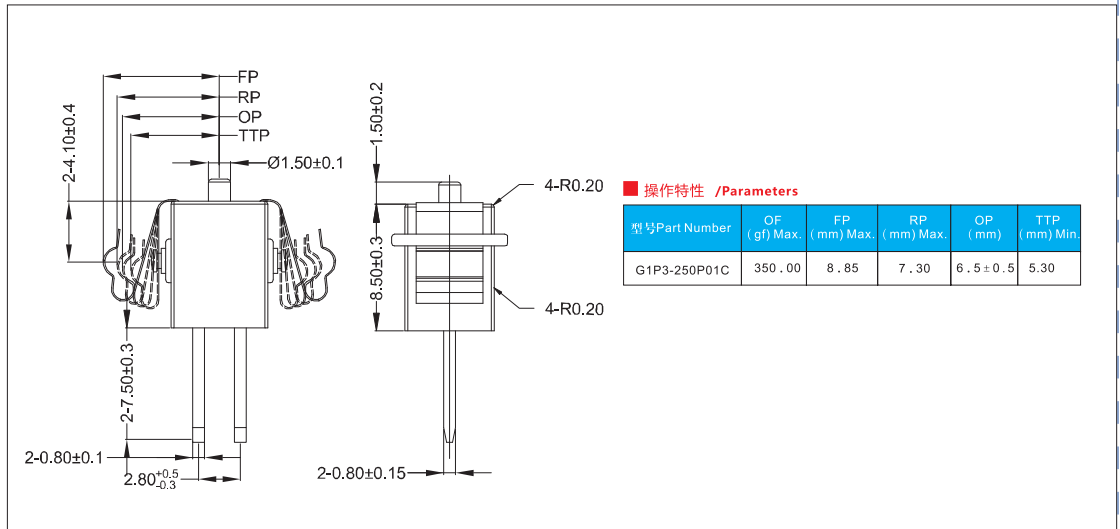

## ■ G17外形尺寸 /G17 Dimension

